




油润滑旋片式真空泵。流量从 202至 303m³/hr, 极限真空 0.1 mbar(绝对值)。法兰式电机, 转子两侧装有轴承, 叶片采用铝合金材质, 寿命特长, 吸气口内置网状过滤器和止回阀, 压缩腔内采用O型密封圈。

法兰式电机符合 DIN EN 60034 标准, 保护标准 IP 54, 绝缘等级 F。

Oil flooded rotary vane vacuum pump with capacities ranging from 202 to 303 m³/hr and an ultimate vacuum of 0.1 mbar (abs.). Flange motor, bearings on both sides of the rotor, long-life vanes, O-ring sealed compression chamber. Mesh filter and return valve integrated in suction side.


Flange mounted motors comply with DIN EN 60034, have IP 54 protection and insulation class F.

50 Hz 选型图 • Selection diagram

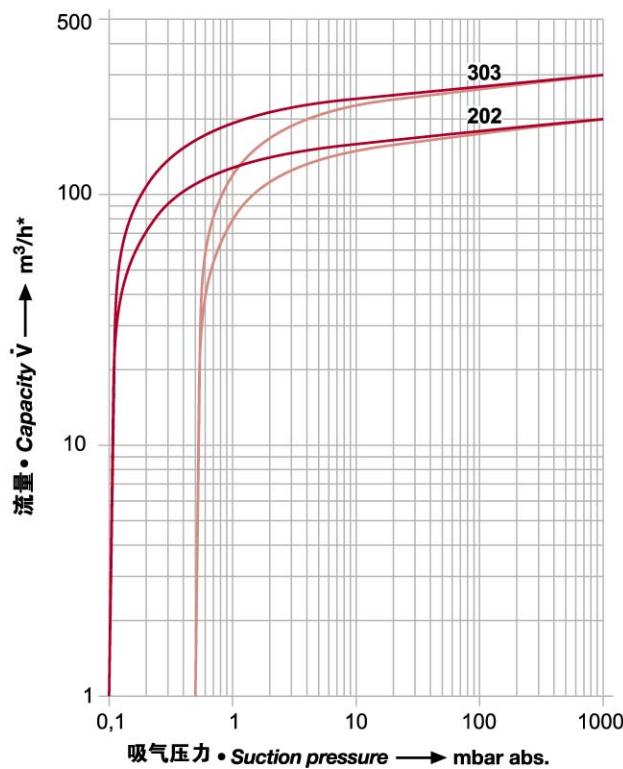

— 无气镇阀 • without gas ballast
— 带气镇阀 • with gas ballast

60 Hz 选型图 • Selection diagram

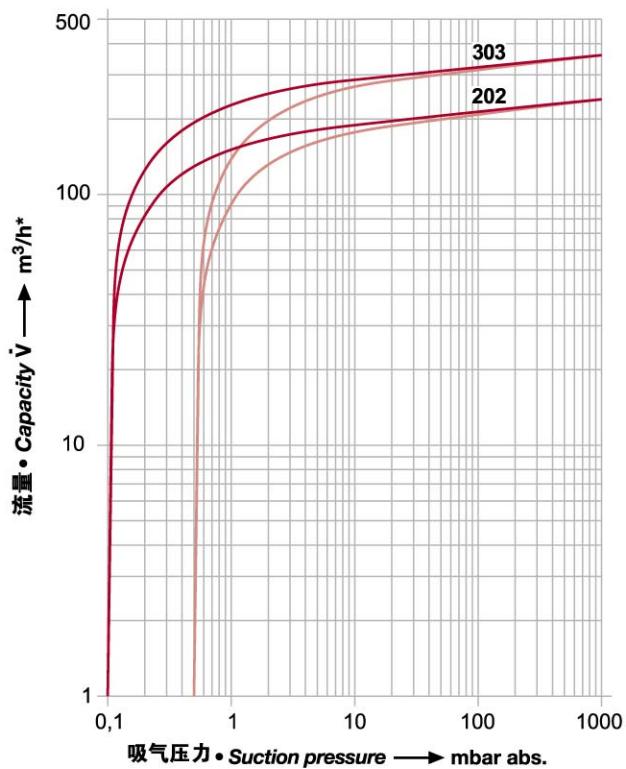

VC		202		303
额定流量	m ³ /h	50 Hz	200	300
Nominal capacity		60 Hz	240	360
极限真空	mbar (abs.)			0,1
Ultimate partial pressure				
电机类型	3~	50 Hz	400 / 690V ± 10 %	400 / 690V ± 10 %
Motor version		60 Hz		380 / 660V
电机功率	kW	50 Hz	5,5	7,5
Motor rating		60 Hz	7,5	9,0
电流	A	50 Hz	13,0 / 7,5	15,0 / 8,7
Current drawn		60 Hz	20,0 / 11,5	19,0 / 11,0
转速	min ⁻¹	50 Hz		1450
Speed		60 Hz		1740
平均噪音	dB(A) → DIN45635	50 Hz	69	70
Average noise level		60 Hz	73	74
最大重量	kg	50 Hz	174	187
Maximum weight		60 Hz	191	192
油量	l		8	8
Oil capacity				